




SELECT:



Cobre





Hierro

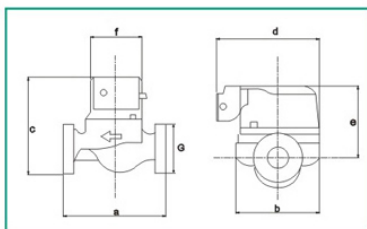

GRS	Rp	G	a	b	c	d	e	f
mm								
GRS25/4	1.5"	1.5" M	130	90	125	120	100	80
GRS25/6	1.5"	1.5" M	180	90	125	120	100	80
GRS25/4	1.5"	1.5" M	180	90	125	120	100	80
GRS25/6	1.5"	1.5" M	130	90	125	120	100	80



Este diseño es conveniente para todos el modelo de bomba de circulación.

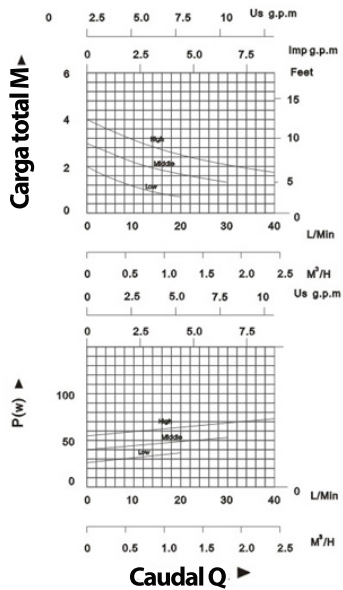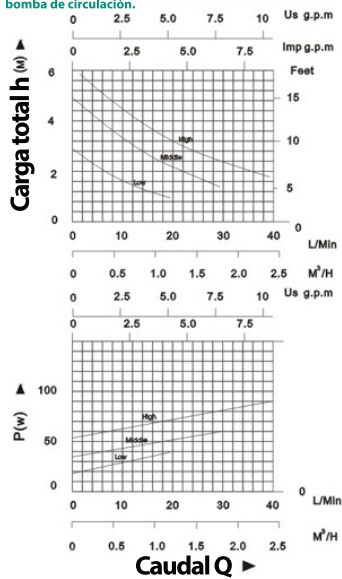

Modelo de bomba	Potencia		Máx. Flujo L/Min	Máx. cabezal M	Entrada/salida mm
	W	HP			
GRS25/6(High)	90	0.12	40	6	38 x 38(1.5")
GRS25/6(Middle)	60	0.08	30	5	38 x 38(1.5")
GRS25/6(Low)	40	0.05	20	3	38 x 38(1.5")

Modelo de bomba	Potencia		Máx. Flujo L/Min	Máx. cabezal M	Entrada/salida mm
	W	HP			
GRS25/4(High)	72	0.09	40	4	38 x 38(1.5")
GRS25/4(Middle)	53	0.07	30	3	38 x 38(1.5")
GRS25/4(Low)	36	0.05	20	2	38 x 38(1.5")